


Feet x .305 = Meters
 Inches x 25.4 = Millimeters
 GPM x .227 = Cubic Meters/Hour
 GPM x 3.785 = Liters/Minute
 HP x .746 = KW

Speed	Impeller Dia.	Style	Solids Dia.	N _S	Suction	Discharge	No. vanes
VARIOUS	17.5"	ENCLOSED	3.38"	2750	10"	10"	2

SINGLE VOLUTE

MOUNTING CONFIG.: F, VF, EM, VC

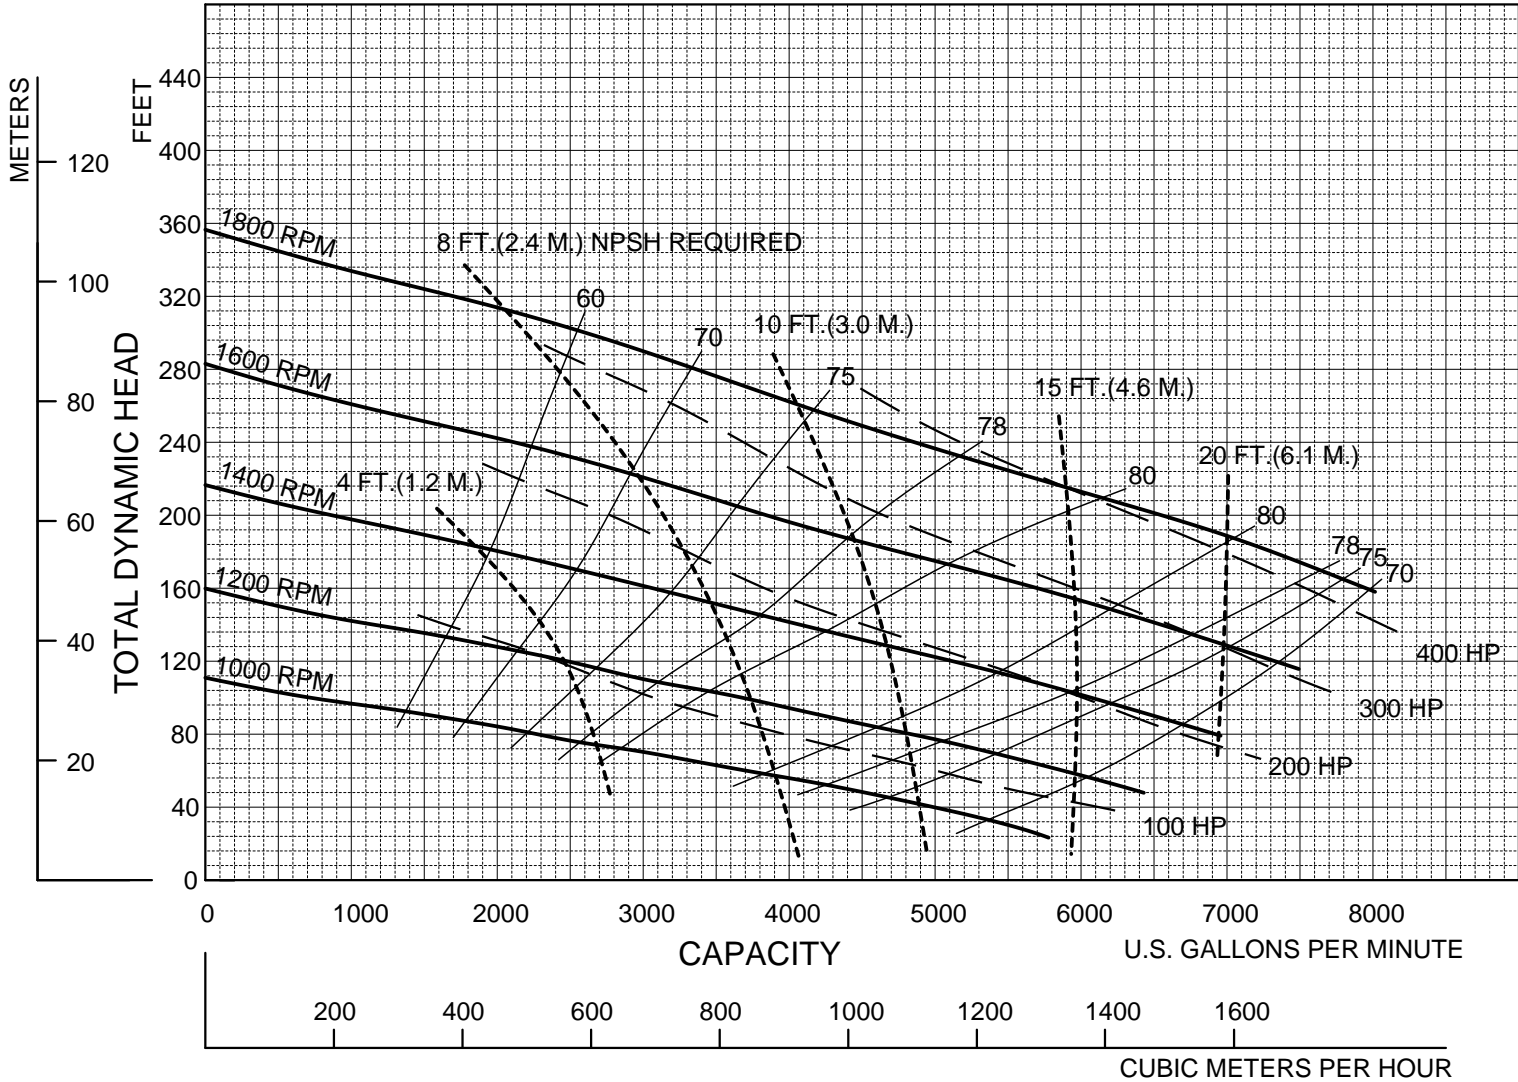

Performances shown are for cool water, frame mounted configuration with Cyclo Seal®. Other liquids, seal arrangements or mounting configurations may require performance adjustments.

6/13/07



Cornell Pump Company • Portland, Oregon

10NNT - VARIOUS RPM

Efficient by Design