


Feet x .305 = Meters
 Inches x 25.4 = Millimeters
 GPM x .227 = Cubic Meters/Hour
 GPM x 3.785 = Liters/Minute
 HP x .746 = KW

Speed	Impeller Dia.	Style	Solids Dia.	N _S	Suction	Discharge	No. vanes
VARIOUS	14.0"	ENCLOSED	3"	1350	5"	4"	2

SINGLE VOLUTE

MOUNTING CONFIG.: CC, VM, F, VF, EM, VC

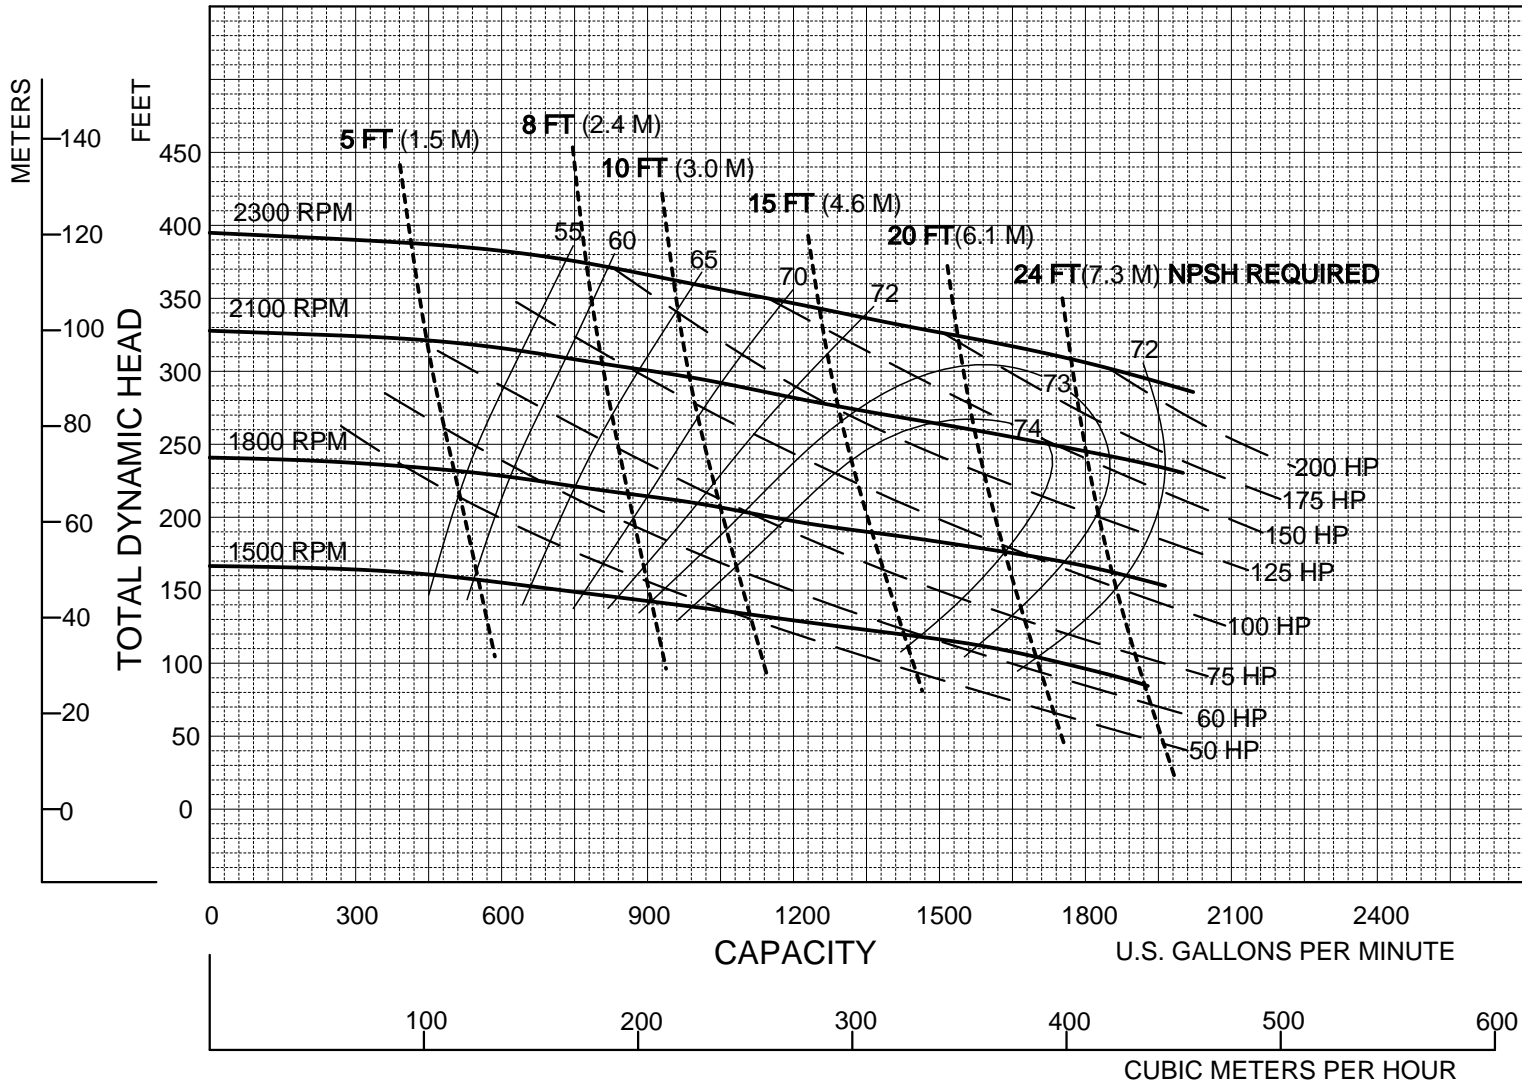

Performances shown are for cool water, close-coupled electric configuration with Cyclo Seal. Other mounting styles or liquids may require horsepower and/or performance adjustments.

4514TVA

06/04/07



Cornell Pump Company • Portland, Oregon

4514T - VARIOUS RPM

Efficient by Design