


Feet x .305 = Meters
 Inches x 25.4 = Millimeters
 GPM x .227 = Cubic Meters/Hour
 GPM x 3.785 = Liters/Minute
 HP x .746 = KW

Speed	Impeller Dia.	Style	Solids Dia.	N _S	Suction	Discharge	No. vanes
VARIOUS	19.50"	ENCLOSED	2.00"	1050	8"	6"	2

SINGLE VOLUTE

MOUNTING CONFIG.: CC, VM, F, VF, EM, VC

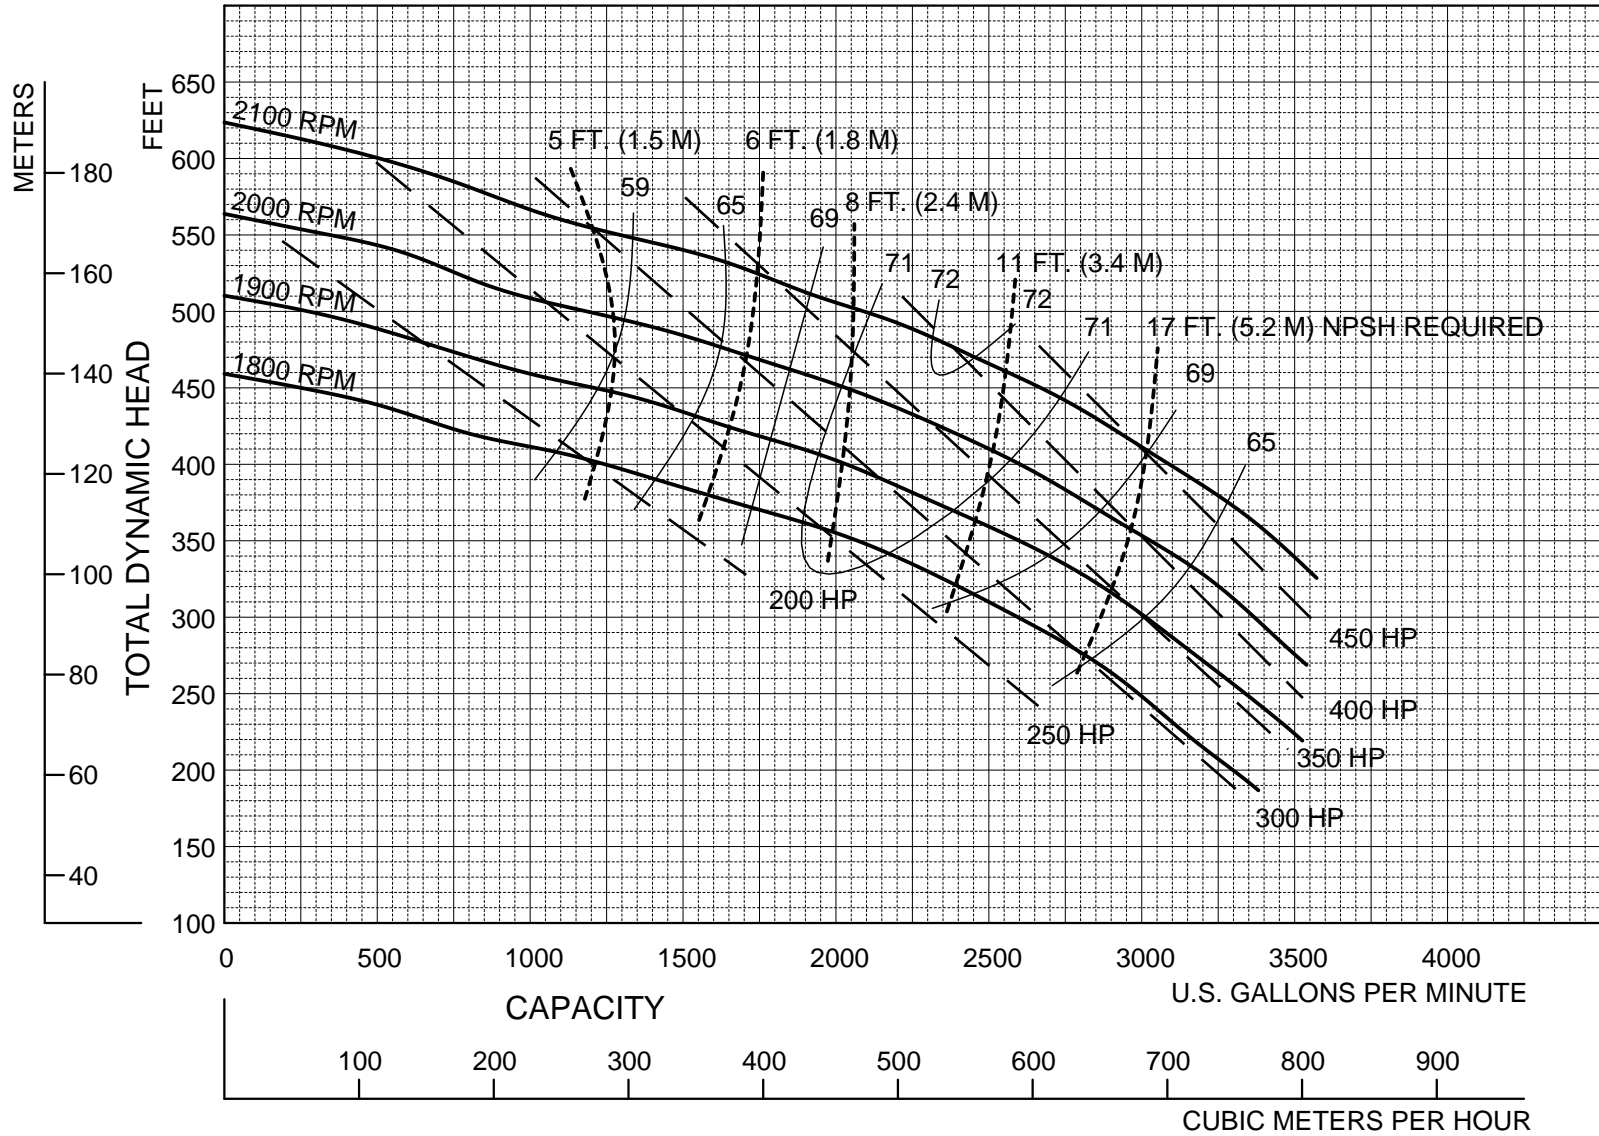

Performances shown are for cool water,
 frame mounted configuration with Cyclo Seal.[®]
 Other liquids, seal arrangements or mounting
 configurations may require performance
 adjustments.

NEW PAGE

6NHTB19VA

9/17/09



Cornell Pump Company • Portland, Oregon

6NHTB19 - VARIOUS RPM